

FUME HOODS

Product Catalog





Table of Contents



Formaspace Flow™ 110	3
Formaspace Flow™ 210	8
Formaspace Flow™ 410	12
Formaspace Custom Fume Hoods	14
Colors	15



Formaspace Flow™ 110

Single-Sided Fume Hood, Bench-Mounted




Formaspace Flow 110 is a **bench-mounted, single-sided fume hood** designed for **everyday laboratory applications** requiring dependable containment, clear visibility, and efficient use of space. The streamlined posts, radiused airfoil, and 36-inch high viewing area create a softer visual profile compared to conventional laboratory fume hoods.

Designed to support both constant volume (CV) and variable air volume (VAV) systems, Flow 110 integrates seamlessly into new construction and renovation projects alike.


Design & Construction

Flow 110 features a full-frame steel construction with a durable powder-coated finish engineered for long-term laboratory use. The frameless sash design and flush-mounted airfoil improve visibility while promoting smooth airflow across the work surface. A chain-and-sprocket sash drive provides balanced, reliable operation, while the high viewing area enhances user comfort and safety.


- Designed for CV or VAV systems
- Optimal interior working depth
- Chain and sprocket shaft drive sash
- 10" Round SS Duct Collar(s)
- Full Frame Construction
- Powder Coated Finish
- UL1805 Listed
- Flush mount airfoil
- LED Lights
- Full-length finger lift
- Knock down ready
- 36" High Sightline
- Frameless Sash

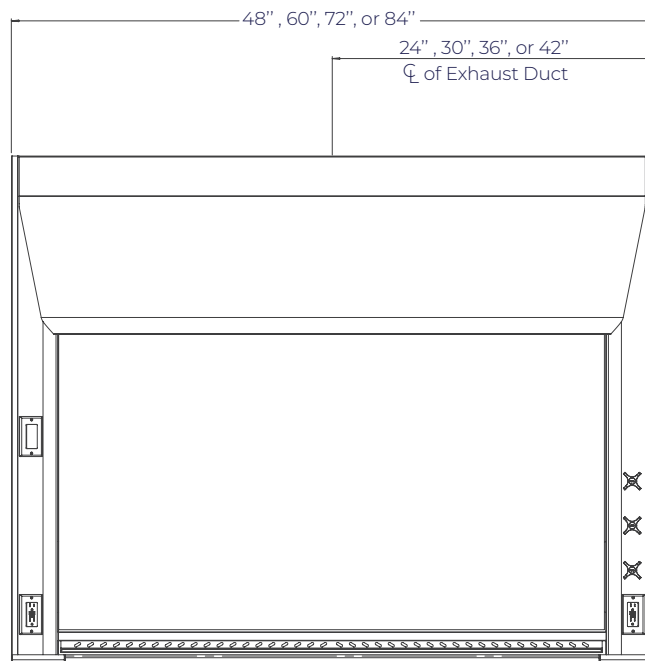

Solution Hood 48" - 72" Front View

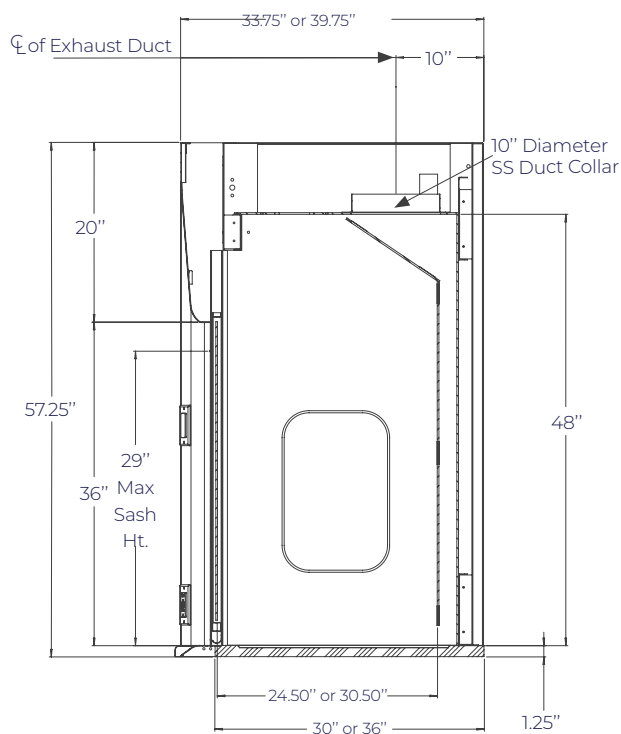

Solution Hood Side View

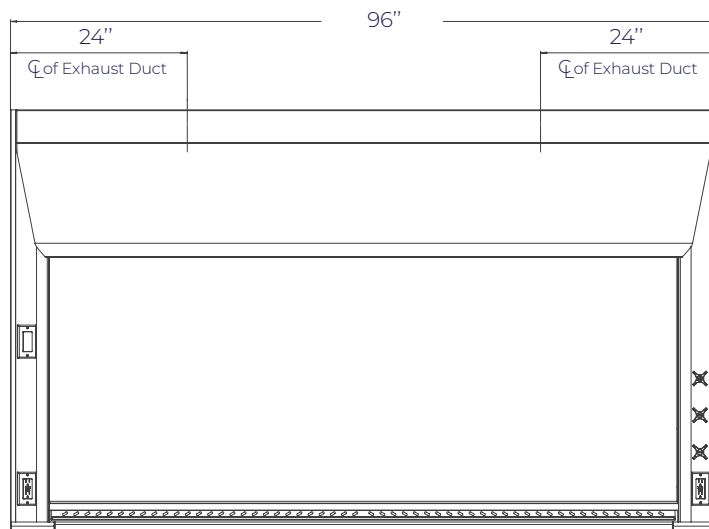

Solution Hood 96" Front View


Available Sizes

Widths: 48", 60", 72", 96"


Depths: 30" or 36"

Height: 57 1/4"

Solution 30" Countertop Depth

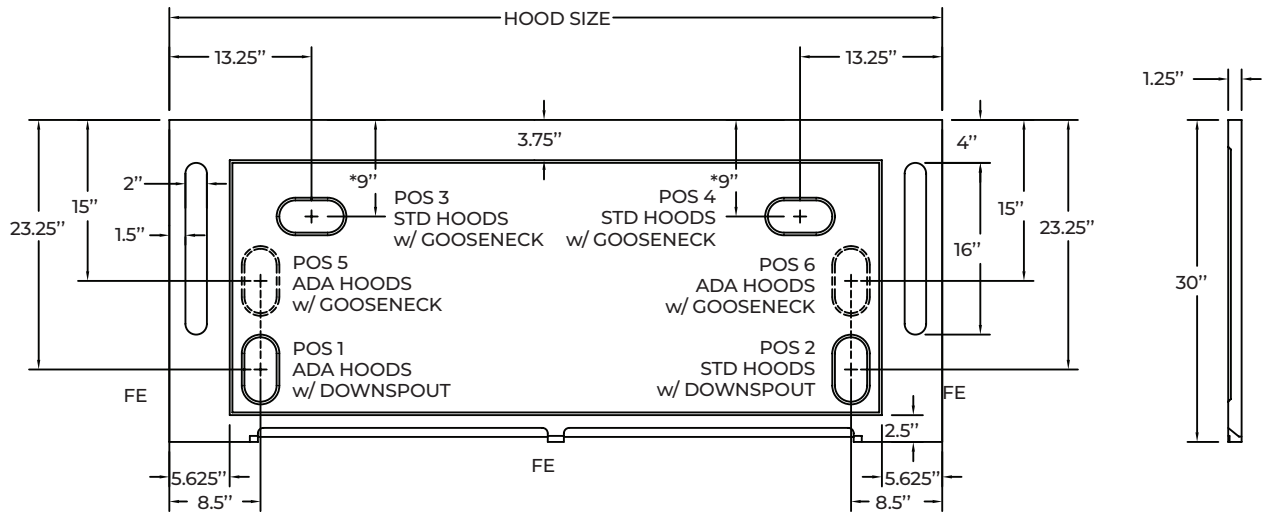

Solution 36" Countertop Depth

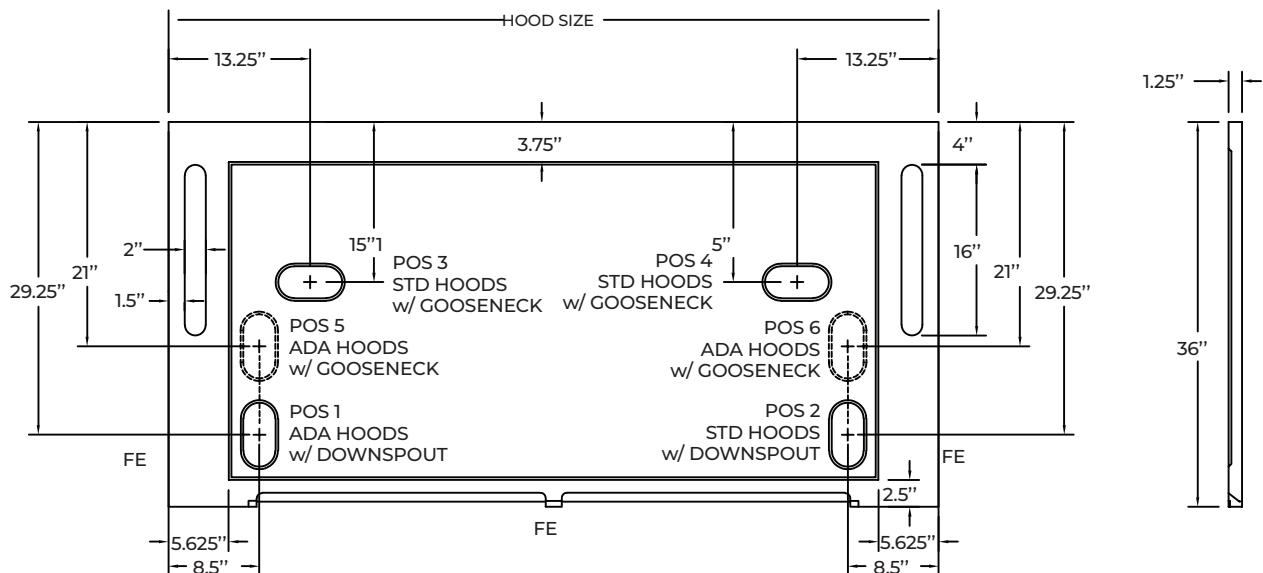

Performance & Safety

The Flow 110 platform is engineered to meet **modern laboratory airflow standards** and supports **face velocities typically ranging from 60–100 FPM**, depending on system design. Optimized interior depth and airflow geometry support consistent containment across common operating conditions.

Flow 110 has been evaluated through third-party testing and meets applicable **NIH, EPA, and ASHRAE 110 performance criteria** at both 100 FPM and 60 FPM, with testing conducted at full sash opening and at an 18" operating height. A 36-inch high viewing area enhances visibility while maintaining reliable containment.

All services are positioned outside the primary airflow path to enhance user safety and simplify maintenance.

Performance Characteristics			
Face Velocity Range	HVAC Compatibility	Standard Sash Heights	Exhaust Collar
60 - 100FPM	CV and VAV	18" and 28"	10" round stainless steel(standard)

Technical Info

Formaspace Flow 110 is **available in a broad range of sizes** and configuration options to support diverse laboratory requirements and planning standards. The system is designed to accommodate multiple accessory, liner, and service configurations, allowing **each hood to be tailored to specific project needs.**


All utility services are mounted on the exterior of the hood structure, supporting a safer working environment by **keeping controls accessible without interfering with the primary airflow zone.** This exterior service strategy simplifies operation and maintenance while reinforcing safe laboratory practices.

Flow 110 is suitable for **integration with both constant volume (CV) and variable air volume (VAV) HVAC systems** and is designed to perform consistently across a wide range of laboratory applications.

Part Number*	18" Sash Height		28" Sash Height	
	CFM @ 100 FPM / Static Pressure	CFM @ 60 FPM / Static Pressure	CFM @ 100 FPM / Static Pressure	CFM @ 60 FPM / Static Pressure
Solution-48	475/0.10	285/0.04	739/0.26	433/0.09
Solution-60	625/0.12	375/0.05	972/0.32	583/0.12
Solution-72	775/0.16	465/0.06	1206/0.41	723/0.15
Solution-96	1075/0.11	645/0.04	1672/0.29	1003/0.10



Standard Accessories

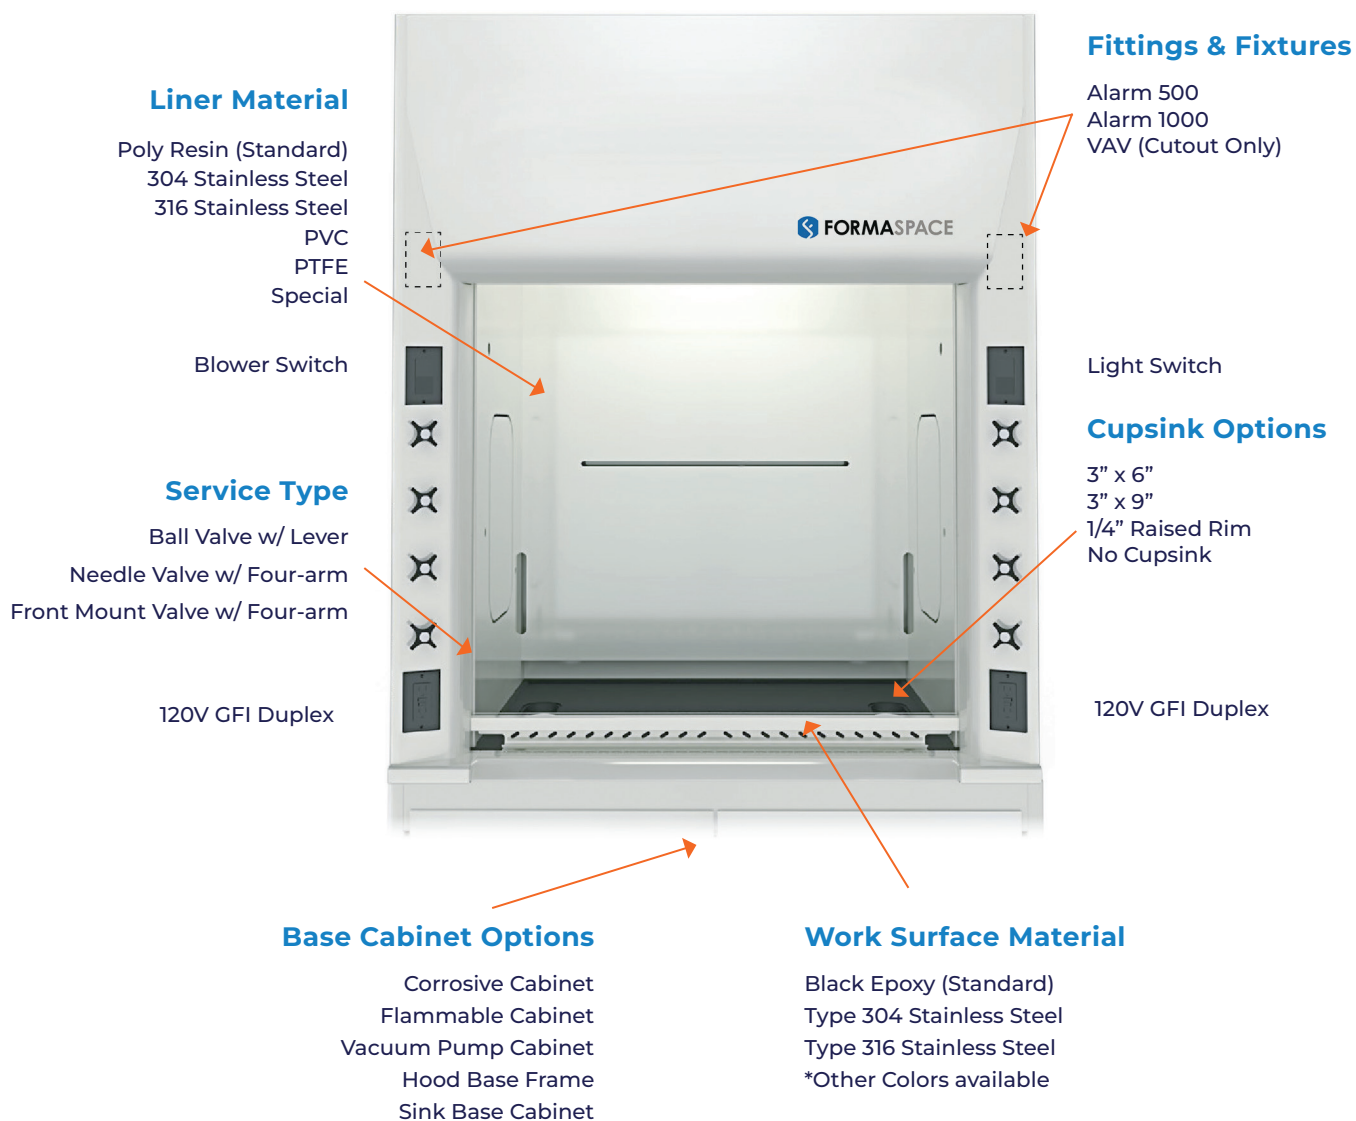

Typical Applications

- Wet Laboratories
- General chemistry labs
- Research laboratories
- Teaching and instructional labs

Formaspace Flow™ 210

Double-Sided Shared Workstation Fume Hood, Bench-Mounted



Formaspace Flow 210 is a **double-sided, bench-mounted fume hood** designed for **shared laboratory workstations and collaborative environments**. By allowing two users to work back-to-back, Flow 210 maximizes floor space efficiency while maintaining strong containment performance, excellent visibility, and safe access to services from both sides.

Engineered to support instructional and collaborative lab settings, Flow 210 provides clear sightlines through generous glazing, making it especially well suited for undergraduate teaching labs, shared research spaces, and environments where demonstration and observation are essential.

Design & Construction

Flow 210 features a full-frame steel construction with streamlined vertical posts and dual frameless sash assemblies that provide unobstructed, 360-degree viewing through the work zone. Large glass panels maximize ambient light penetration, improving visibility for users and observers while supporting effective instruction and demonstration.

All plumbing fixtures and service controls are front-loaded and positioned within arm's reach, eliminating the need for users to place their head or upper body inside the hood to access utilities. The hood is engineered to support both back-to-back and side-by-side installations, allowing layouts to evolve as program needs change.



- Powder coat finish
- Full frame construction
- U.L. listed poly resin liner
- Flush-mount airfoil
- Knock down capability
- LED light with bulbs
- Full-length finger lift
- Louvered front for by-pass
- 10" round S/S duct collar

Available Sizes

Widths: 36", 48", 60", 72", 96"

Depths: 29"

Height: 57 1/4"

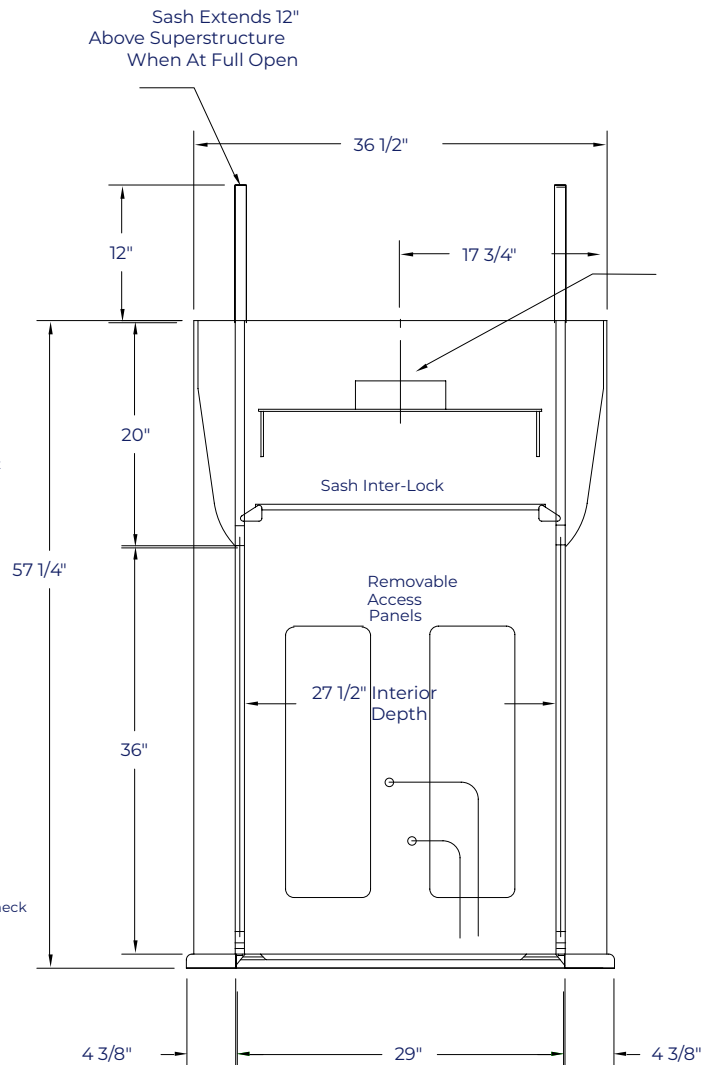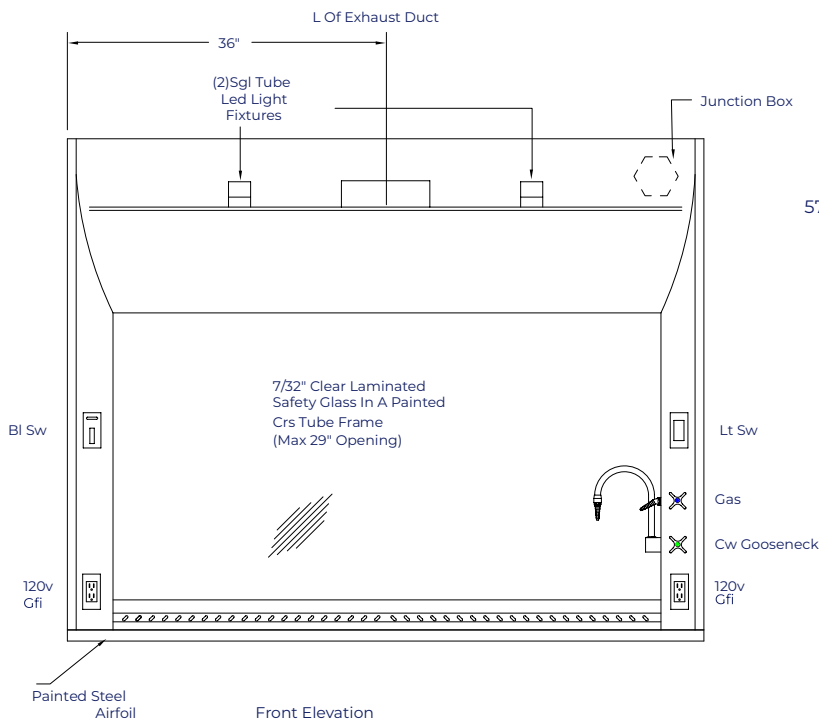

Vertical Section

Performance & Safety

Designed for compatibility with both **constant volume (CV) and variable air volume (VAV) HVAC systems**, Flow 210 maintains consistent airflow and containment performance across both work faces. Optimized **sash geometry, airflow management, and interior depth** support stable face velocities while accommodating multiple users operating simultaneously.

Clear laminated safety glass panels enhance protection for users and nearby occupants, while organized service zones and exterior-mounted controls reinforce safe laboratory practices.



Hood Exhaust Ratings:

At Full Open @ 100 Lfm, 1206 CFM

.41 Static Pressure At Fume Hood Duct Collar

At 18" Open @ 100 Lfm, 775 CFM

.16 Static Pressure At Fume Hood Duct Collar

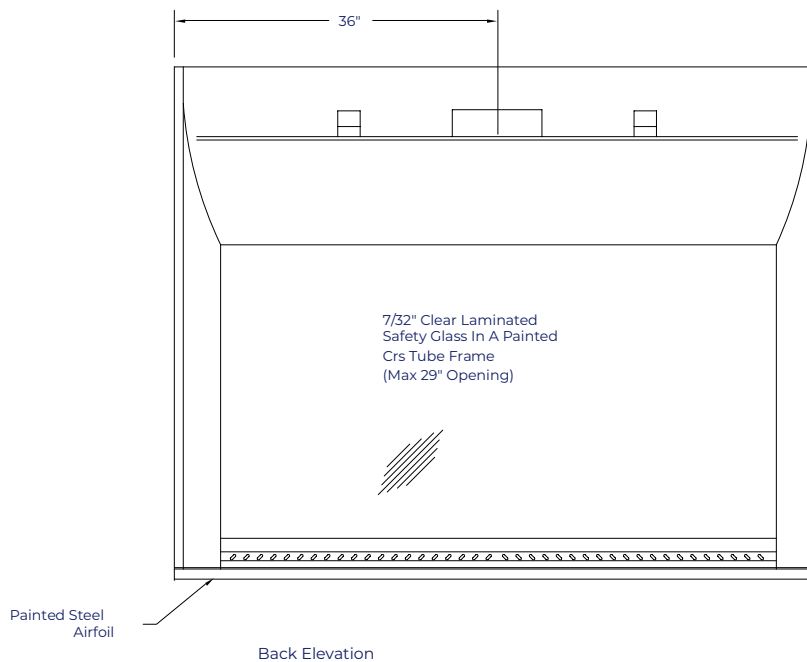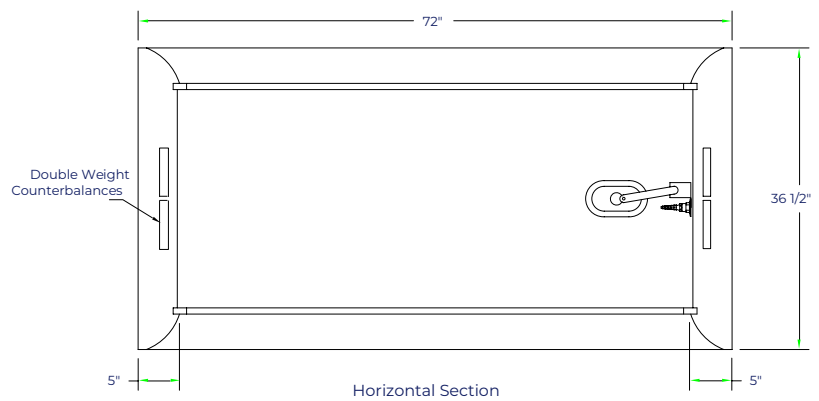


Technical Info

Flow 210 incorporates **clear 7/32" laminated safety glass side panels** that provide physical protection while maintaining full visual access to the work area. **Dual integrated LED light fixtures** deliver consistent interior illumination to support clear visibility during experiments and demonstrations.

A 37.5" vertical hood opening accommodates taller instructional equipment and apparatus commonly used in teaching and collaborative laboratory environments. Service valves and electrical outlets are front-mounted and positioned within arm's reach, supporting safe operation and convenient access to utilities without requiring users to enter the hood workspace.

Part Number	Superstructure			Worktop			Hood Opening		CFM @ 29"	CFM @ 18"	SP	Blower Model #	Shipping Weight
	W	H	D	W	H	D	W	H					
EH-211-36	36"	56"	35-1/2"	36"	1-1/4"	29"	26"	29"	567	354	.25	BL-100-36	400
EH-211-48	48"	56"	35-1/2"	48"	1-1/4"	29"	38"	29"	833	521	.33	BL-100-48	450
EH-211-60	60"	56"	35-1/2"	60"	1-1/4"	29"	50"	29"	1100	688	.34	BL-100-60	500
EH-211-72	72"	56"	35-1/2"	72"	1-1/4"	29"	62"	29"	1367	854	.34	BL-100-72	550
EH-211-96	96"	56"	35-1/2"	96"	1-1/4"	29"	86"	29"	1900	1188	.40	BL-100-96	650

Standard Accessories

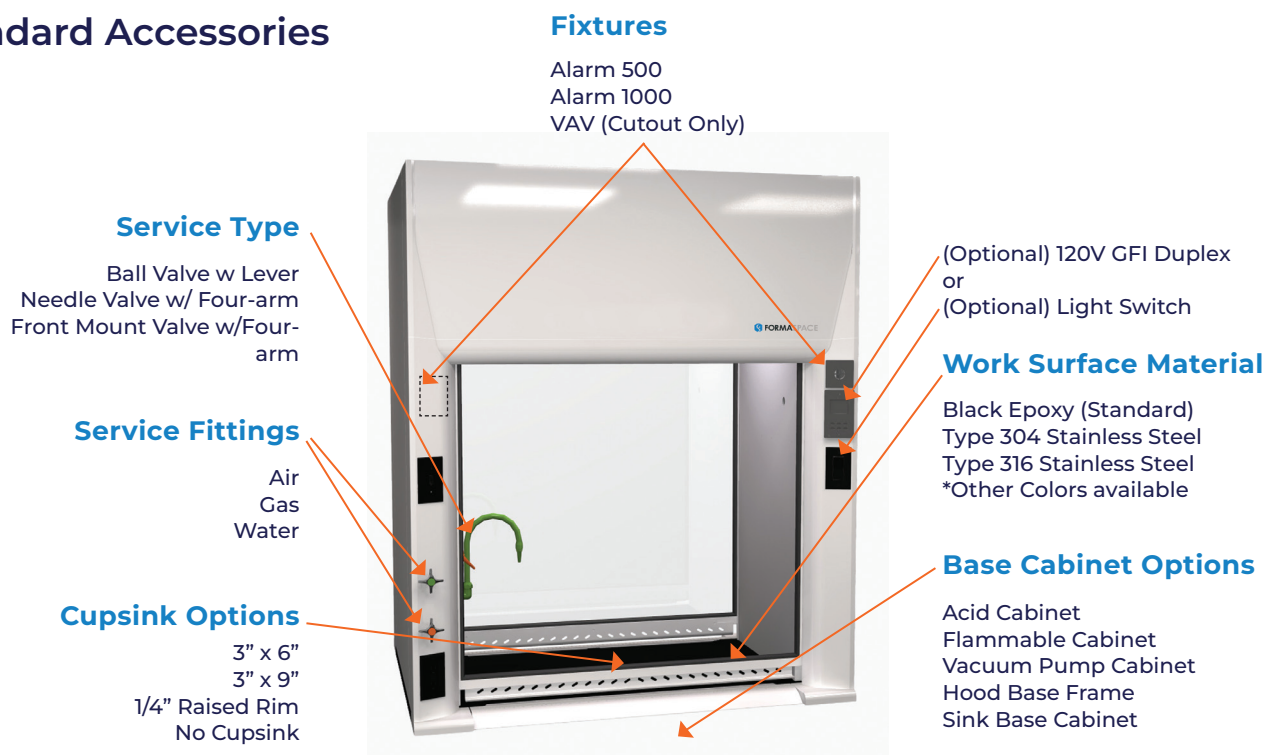

Typical Applications

- Undergraduate teaching laboratories
- Collaborative research labs
- Shared academic workstations
- Demonstration-based lab environments



Formaspace Flow™ 410

Walk-In & Large Apparatus Fume Hood, Floor-Mounted



Formaspace Flow 410 is a **floor-mounted fume hood** engineered to accommodate large equipment, tall apparatus, and walk-in laboratory processes.

Featuring a double-hung sash configuration with a 72" high vertical opening, Flow 410 supports applications that exceed the capacity of standard bench-mounted hoods while maintaining dependable containment performance.


Designed for demanding environments, Flow 410 is well suited for **pilot-scale research, industrial laboratories, and specialty chemical applications** requiring increased vertical clearance.

Design & Construction

Flow 410 features a robust steel frame with 5" (127 mm) wide vertical posts engineered to provide structural stability at increased heights. The double-hung sash system offers operational flexibility when loading, adjusting, or operating tall equipment, while the high sightline design maintains visibility across the full opening.

The hood utilizes a knock-down construction approach that simplifies installation, relocation, maintenance, and future reconfiguration—making even large-format hoods easier to transport and service over the life of the

- Designed for CV or VAV systems
- Optimal interior working depth
- Chain and sprocket shaft drive sash
- 10" Round SS Duct Collar(s)
- Powder Coated Finish
- UL1805 Listed
- LED Lights
- Full-length finger lift
- Knock down ready
- Louvered front for bypass
- 60-100 FPM
- 36" High Sightline
- Frameless Sash

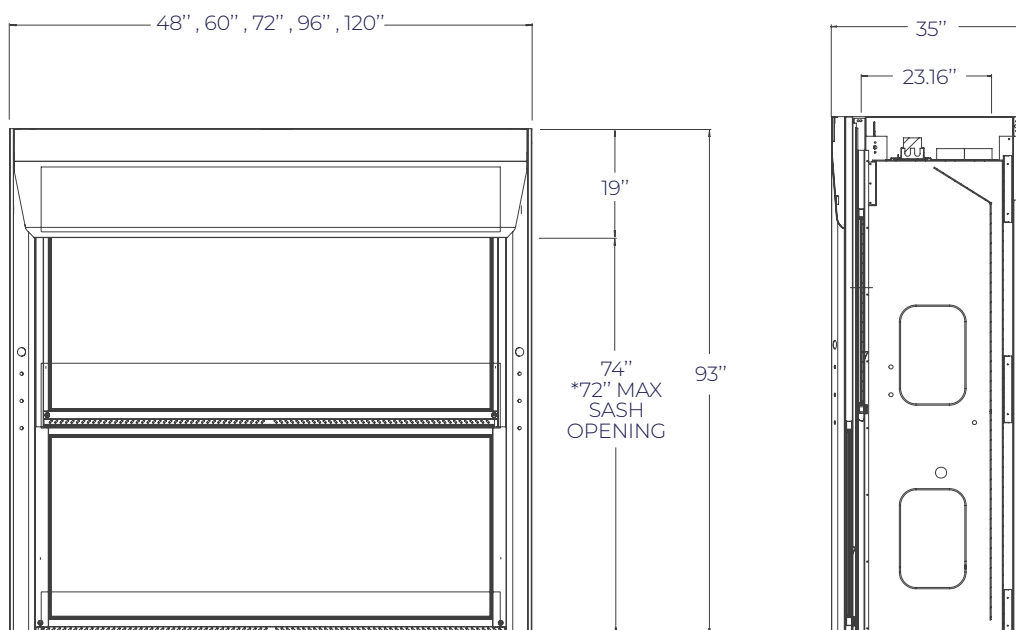

Available Sizes

Widths: 48", 60", 72", 84", 96", 120"

Depths: 30" or 36"

Height: 93"

Performance & Safety

Flow 410 supports both **constant volume (CV) and variable air volume (VAV) HVAC systems** and is designed to maintain **stable airflow** across large vertical openings. Louvered bypass airflow and optimized interior geometry help balance containment performance and energy efficiency, even when operating with oversized apparatus or partial sash openings.

Typical Applications

- Industrial laboratories
- Pilot-scale research facilities
- Large-apparatus testing
- Specialty and high-volume chemical processes

Formaspace Custom Fume Hoods

Engineered for Specialized Applications



When standard configurations are not enough, **Formaspace Custom Fume Hoods** are engineered to meet exact project requirements. From non-standard dimensions to specialized airflow strategies, materials, and safety features, our team collaborates closely with clients, architects, and engineers to deliver purpose-built containment solutions.

Custom configurations may include **wet lab floor-mounted systems, laminar flow fume hoods, or hybrid containment solutions** designed around unique workflows and equipment.

Design Approach

Each custom hood begins with a detailed application review to define airflow needs, equipment clearance, materials compatibility, and integration with building systems. The result is a solution that supports safety, performance, and long-term adaptability.

Contact your account manager to get started. hello@formaspace.com

Finishes

Powder coating is a durable, cost-effective, and environmentally friendly finishing solution that outperforms traditional paint. At formaspace.com, we offer high-quality powder coating services designed for industrial and professional applications. Our finishes provide superior resistance to wear, chemicals, and corrosion - ensuring long-lasting performance for you workspace.

Steel Frame Colors

Powder Coating Options for Frames



Black Semi Gloss
BK266




Steel Gray
Pearlescent
T028-GR02




Gray
RAL7045



Light Gray
RAL7035



White Smooth
WH11



Petal White



Almond
BG01



Red
D01



Sapphire Blue
RAL5003



Traffic Blue
RAL5017



Blue
RAL5012




Custom Provide
us your color
values

Front Materials



Black Semi Gloss
BK266



Black Texture
BK59




Steel Gray
Pearlescent
T028-GR02



Gray
RAL7045



Light Gray
RAL7035



Sparkle Silver
049/90450



Almond
BG01



Red
D01




Sapphire Blue
RAL5003




Traffic Blue
RAL5017




Blue
RAL5012



White Texture
WH120



White Smooth
WH11




Petal White



Custom Provide
us your color
values


Epoxy



Black



Gray



White

Every project is different.

That's why we deliver at three levels each with the same American-made quality, sourced and built in Austin, Texas.



STANDARD

Proven configurations from our catalog, ready to order and built to ship.

4 to 6 weeks*



MODIFIED

Our standard platforms, adapted to your specific dimensions, finishes, or features.

6 to 8 weeks*



CUSTOM

Fully bespoke design and engineering for unique workflows and constraints.

10 to 14 weeks*

*Subject to change based on supply. Confirm details with account manager.

Need it faster?

Ask about **Smart Ship™** Program:
Select standard workbenches in
10 business days.

📍 Austin, Texas
📞 800.251.1505
🌐 formaspace.com
✉ hello@formaspace.com



Lab. Industrial. Workplaces. It's in our DNA.

September 8, 2026 3:56 PM